

SPECIAL 56S/56X

INTERNAL AND EXTERNAL DOOR DOORS - REINFORCED




available glazing designs P. 26-37

Example of SPECIAL 56S door in ANTHRACITE colour, QUATRO pattern

STANDARD FITTINGS AND FOR AN ADDITION

DOOR STRUCTURE

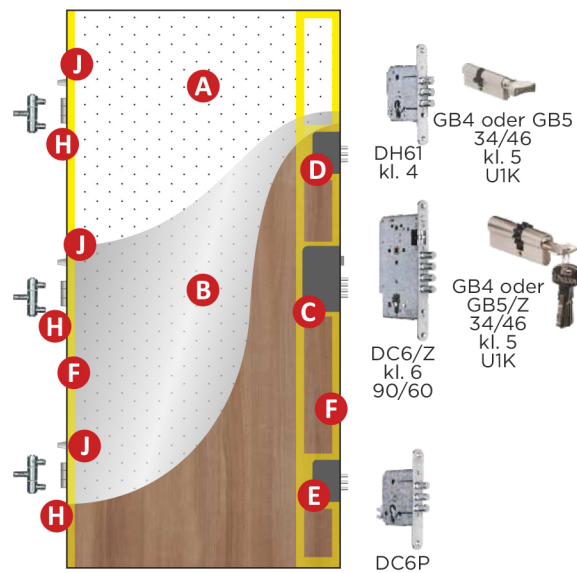

STANDARD

56
 RC2 WITHOUT GLAZING
 RC2N GLAZED
 1,1-1,4 ODS56 FRAME
 1,3-1,5 PU FRAME
 28 dB
 CE UE

STANDARD:
Fitting
CARMEN
stainless steel



AT EXTRA COST:
Fitting
VERA INOX
stainless steel
recommended for external doors




AT EXTRA COST:
Fitting
TAMARA'2 INOX
stainless steel
recommended for external doors
(without the possibility of using a bar)



AT EXTRA COST:
Fitting
ALEX ALU
aluminum anodized
recommended for external doors
(without the possibility of using a bar)



NOTE!
The DELTA SPECIAL 56S door with the ALEX ALU handle does not have a RC2 class burglary resistance.

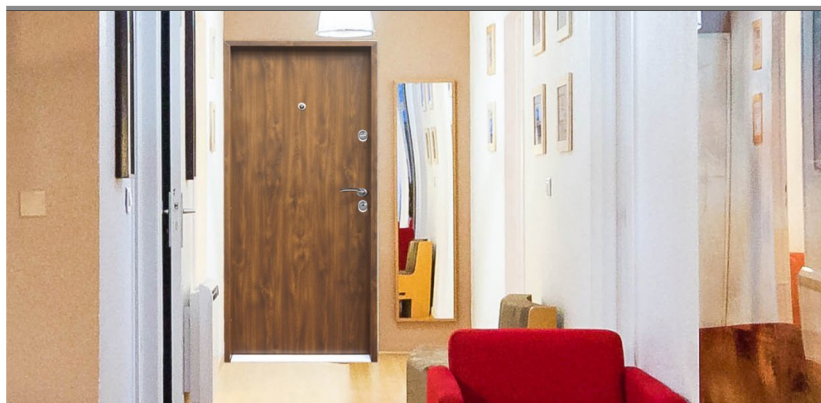

INOX - Applikation look P. 27

**PLAIN
INOX APPLIKATION
80N/90E**

 ANTHRAZITE, WHITE,
SONOMA OAK, DARK NUT,
WINCHESTER,
WENGE, GOLDEN OAK*

**PLAIN
80N/90E**

 ANTHRAZITE, WHITE,
SONOMA OAK, DARK NUT,
WINCHESTER,
WENGE, GOLDEN OAK*

**GENOA
DEEPLY PRESSED
80N/90E**

 WHITE, DARK NUT,
WENGE, GOLDEN OAK

**FRAME
DEEPLY PRESSED
ONLY 90E**

 ANTHRAZITE, WHITE, DARK NUT,
WENGE, GOLDEN OAK

**QUATRO
SHALLOWLY PRESSED
80N/90E**

 ANTHRAZITE, DARK NUT,
WINCHESTER, WENGE,
GOLDEN OAK


PD150: 80N - 880 x 2060mm, **90E** - 1000 x 2085mm

Each door mounted outside the building requires a suitable roof to protect against sun and rain.
They should also have a mounted bumper-door stopper to avoid hinged breaks when opening above 90 °.
It is recommended to use the ODS56 door frame.

Frame PD56/150

STANDARD in the price of the frame:
Thresholds Termo ALU/PCV PD56/150


COLOURS



ANTHRAZITE


 PLAIN
QUATRO


WHITE

 PLAIN
GENOA
FRAME


SONOMA OAK


PLAIN



DARK NUT

 PLAIN
GENOA
FRAME
QUATRO


WINCHESTER

 PLAIN
QUATRO


VENGE

 PLAIN
GENOA
FRAME
QUATRO


GOLDEN OAK

 PLAIN
GENOA
FRAME

**SPECIAL 56X doors only in 90E dimension,
in ANTHRACITE, DARK NUT, GOLDEN OAK
colorus**

ACCESSORIES FOR AN ADDITION

SPECIAL 56S

Glazing types for external doors	look P. 30-39
Thermo ODS56 door frame with Thermo PU56 threshold	at extra cost Tel.
PD150 door frame with with Thermo PD56 threshold	at extra cost Tel.
Stainless steel fitting set VENUS INOX	-
Stainless steel fitting set VERA INOX	Standard
Stainless steel fitting set CARMEN INOX	at extra cost Tel.
Stainless steel fitting set TAMARA`2 INOX	at extra cost Tel.
Aluminum fitting set ALEX	at extra cost Tel.
Stainless steel ANETA INOX knob handle	at extra cost Tel.
A2 INOX handrail round 90cm	at extra cost Tel.
A2 INOX handrail rectangular 90cm	at extra cost Tel.
A2 INOX handrail round 140cm	at extra cost Tel.
A2 INOX handrail rectangular 140cm	at extra cost Tel.
A4 INOX handrail round 140cm	at extra cost Tel.
Electromagnetic blockade 12V AC/DC installed in a frame	at extra cost Tel.
Cylinders with 1 key system	Standard
Opening limiter	price Tel. (only Frame PU i PD)
Door closer (silver)	-
Self-closing hinge	at extra cost Tel.
Delta FDV fireproof door viewer	-
CYKLOP PANORAMA 200 fireproof door viewer	price Tel.
DDS-2 digital door viewer	price Tel.
Automatic drop threshold	-
Electronic handles DELTA GI8	price Tel.
INOX applications (one side / both sides)	price Tel. (look S. 27)
ODS wooden-steel fanlights	yes (look P. 48-49)
Boom drip profile for external doors opened inside	price Tel.
Leaf shortening (plain max. / pressed max.)	price Tel. (max 14 cm/max 5 cm)
Boom closing profile	price Tel.
Contact sensor (kontaktron)	price Tel.
Assembly set - 6 dowels with plugs	-
Assembly set - 12 dowels with plugs	price Tel.